DRIVE ENCLOSURE USER MANUAL

MODEL 130172

MANHATTAN™

MAN-130172-UM-0110-03

INTRODUCTION

Thank you for purchasing the MANHATTAN® Drive Enclosure, Model 130172.

With support for large-capacity 3.5” SATA drives up to 2 TB and SuperSpeed USB (USB 3.0) data transfer rates of up to 5 Gbps, this MANHATTAN Drive Enclosure helps optimize high-performance personal computer storage applications.

A convenient built-in, one-touch backup feature helps quickly transfer, share and archive important data. Its durable, two-piece construction and cover lock provides quick installation and access while protecting sensitive drives from exposure and daily hazards. Windows and Mac compatibility plus Plug and Play and hot-swappable capabilities offer a versatile and portable data solution without bulky external power supplies or annoying cables and adapters.

By following the instructions in this user manual — or the simpler installation procedure in the printed quick install guide included with the product — you’ll soon be enjoying these popular features:

- Supports USB 3.0 data transfer rates for up to 5 Gbps and large-capacity drives up to 2 TB
- Lightweight, compact design ideal for portable storage with convenient one-touch copy for easy data transfer
- Sturdy case protects drive and facilitates cooling
- Fits standard 3.5” SATA drives with easy, quick installation — includes rear-mount power switch and LED indicator
- Windows and Macintosh compatible, Plug and Play and hot swappable
- Lifetime Warranty (For a complete list of country-specific warranties, go to www.manhattan-products.com/warranty.)

Package Contents

- Drive Enclosure
- USB cable
- Power adapter
- Stand
- Installation hardware
- Screwdriver
- Software CD
- Quick install guide

System Requirements

- Available USB 3.0 Standard-A port
- Windows XP/Vista/7 and Mac* support

* *One-touch copy feature not supported by Mac systems.*

INSTALLATION

1. Set the Lock/Unlock switch on the end panel to the Unlock position.

2. Slide the cover of the Drive Enclosure off the base.

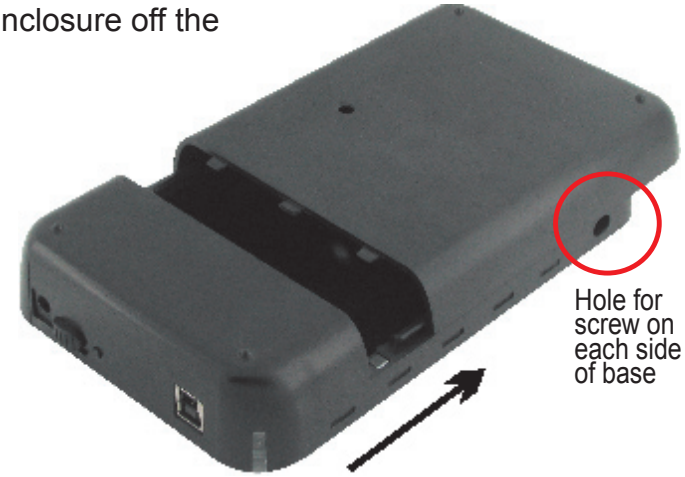

3. Carefully place your hard drive in the base of the enclosure so a solid connection is made with the 22-pin SATA connector.
4. Use the included screws and screwdriver to secure the hard drive in place (see the image above), then slide the cover of the enclosure back in place. Place the device in the stand, if desired.

5. Use the included USB cable to connect the enclosure to your computer.
6. Use the included power adapter to connect the enclosure's +12V jack to a power source.
7. Set the On/Off switch to On when you're ready to use the device. The LEDs on either corner of the end panel will light to indicate either Power (top, as shown above) or Activity.

NOTE: Also shown is the One-Touch Backup button (to the left of the On/Off switch), which is explained in Software Installation.

OPTIONAL: Formatting a New Hard Drive

If you're using a new hard drive with this device, you may need to format it before initial use. If so, follow the procedure above, then continue with the steps below. For more info on formatting drives, go to www.microsoft.com.

1. On your desktop, go to My Computer and select "Manager."
2. When the Computer Manager screen displays, click "Disk Manager" in the left-side window.
3. In the right-side window, recognition of the new hard disk will appear; for example, "Seagate...."
4. Right-click on the new hard drive listing, then select "Delete partition."
5. Right-click on the new hard drive listing, then select "New logical drive."
6. Right-click on the new hard drive listing a third time, then select "Format disk drive."
7. Confirm that the new hard drive is listed in the My Computer window, indicating a proper formatting.

Removing the Drive Enclosure

Before you disconnect the device from your computer, follow these steps.

1. Click the icon on your desktop. (See Driver Installation below.)
2. When the Safely Remove Hardware screen displays, click "Stop."
3. When the "It is now safe to remove the USB device" message displays, disconnect the USB cable (and the power adapter, if connected).

DRIVER INSTALLATION

Once the enclosure is connected to your computer, your system will automatically detect the new hardware and complete the setup, confirmed when the icon at right appears in your desktop systems tray.

SOFTWARE INSTALLATION

These steps are for the installation of the convenient One-Touch Backup software.

NOTE: This software doesn't support Mac operating systems.

Some images are modified to fit the manual format, and your software version may be slightly different than the one shown here.

1. Insert the included software CD into your PC and open the folder “PCCLONEEX_LITE_1_82_01JMICRON.” Double-click “Setup.”
2. When the Welcome screen displays, click “Install” to continue.

3. When the license and warranty agreement displays, read it and click “Agree” to continue. ***NOTE:*** Most screens present the option of clicking “Back” to return to a previous screen or “Quit” to stop the installation procedure.

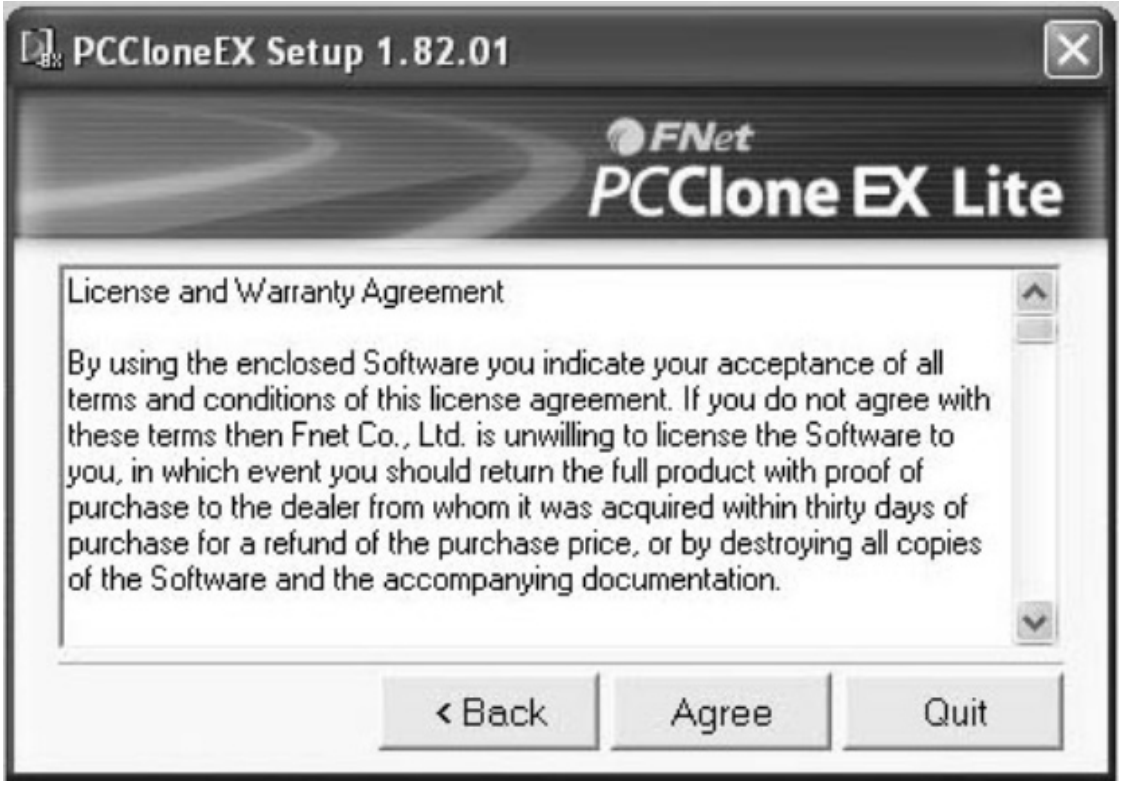
PCCloneEX Setup 1.82.01
FNet
PCClone EX Lite
License and Warranty Agreement
By using the enclosed Software you indicate your acceptance of all terms and conditions of this license agreement. If you do not agree with these terms then Fnet Co., Ltd. is unwilling to license the Software to you, in which event you should return the full product with proof of purchase to the dealer from whom it was acquired within thirty days of purchase for a refund of the purchase price, or by destroying all copies of the Software and the accompanying documentation.
< Back
Agree
Quit

4. When the Setup will install to: screen displays, click “Install”; or click “Browse” to re-direct the file to a location other than the one listed.

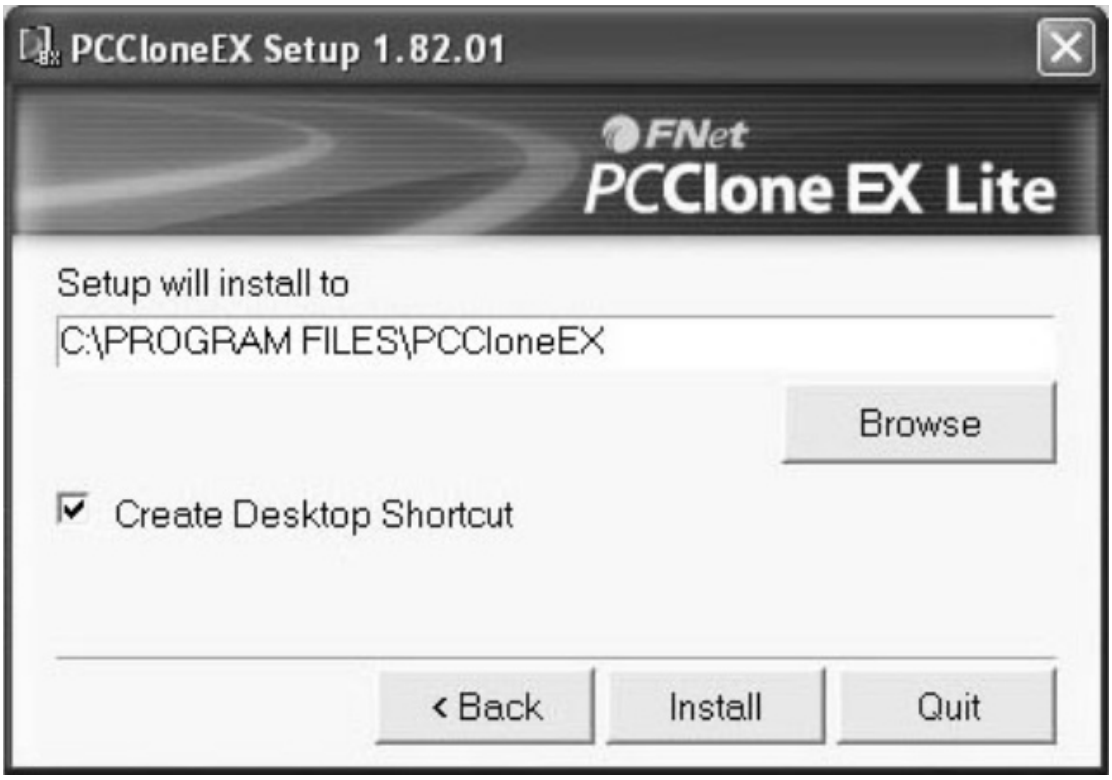

5. Click “OK” to finish the software installation.

ONE-TOUCH BACKUP FUNCTION

These steps show how to use the convenient One-Touch Backup feature.

1. Once the software installation is complete, a PCCloneEX icon will display on the desktop. Double-click the icon to display the Quick Launch screen.

2. Press the One-Touch Backup button (refer to Hardware Installation) to display the Please select file(s) screen, then click “OK.”

3. Select the file(s) you want to back up from the list in the left-side window, then press the backup button again.

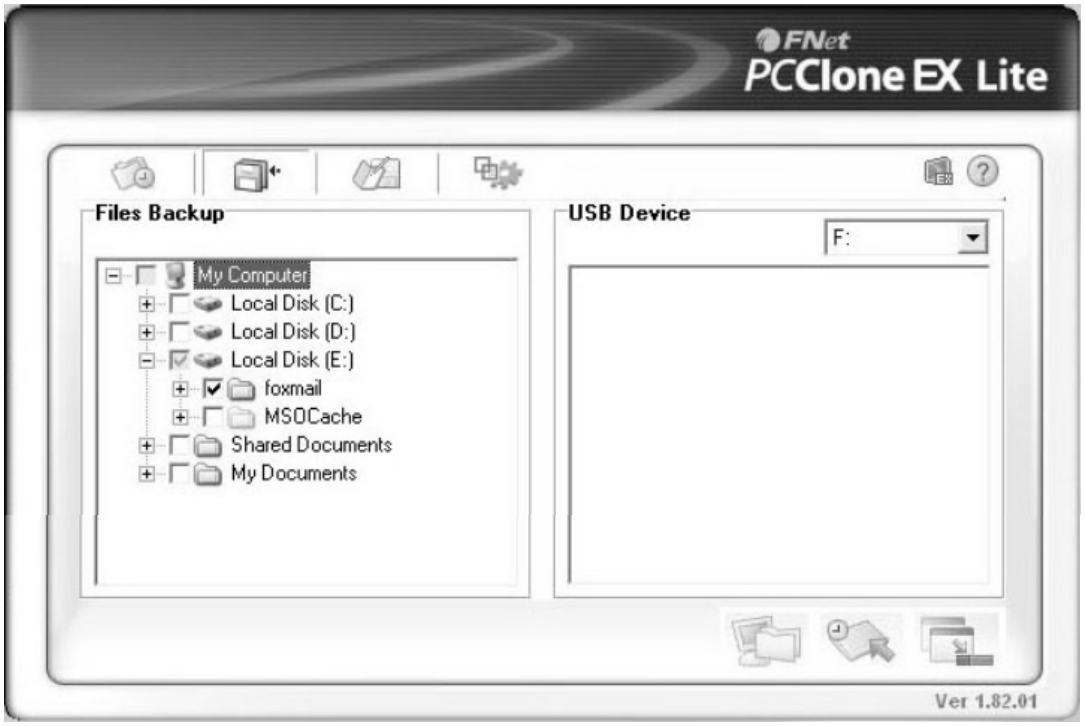

4. When the Files Backup screen displays, click “Start” and the system will begin to back up the selected files.

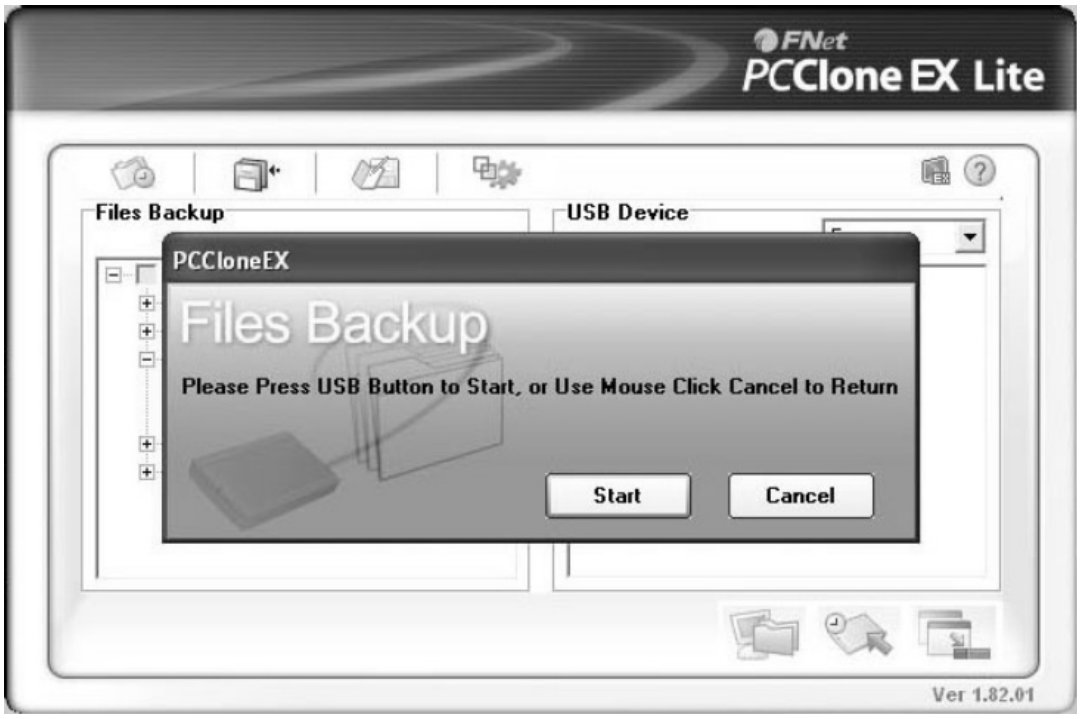

5. When the “Backup Finished” message displays, click “OK.”

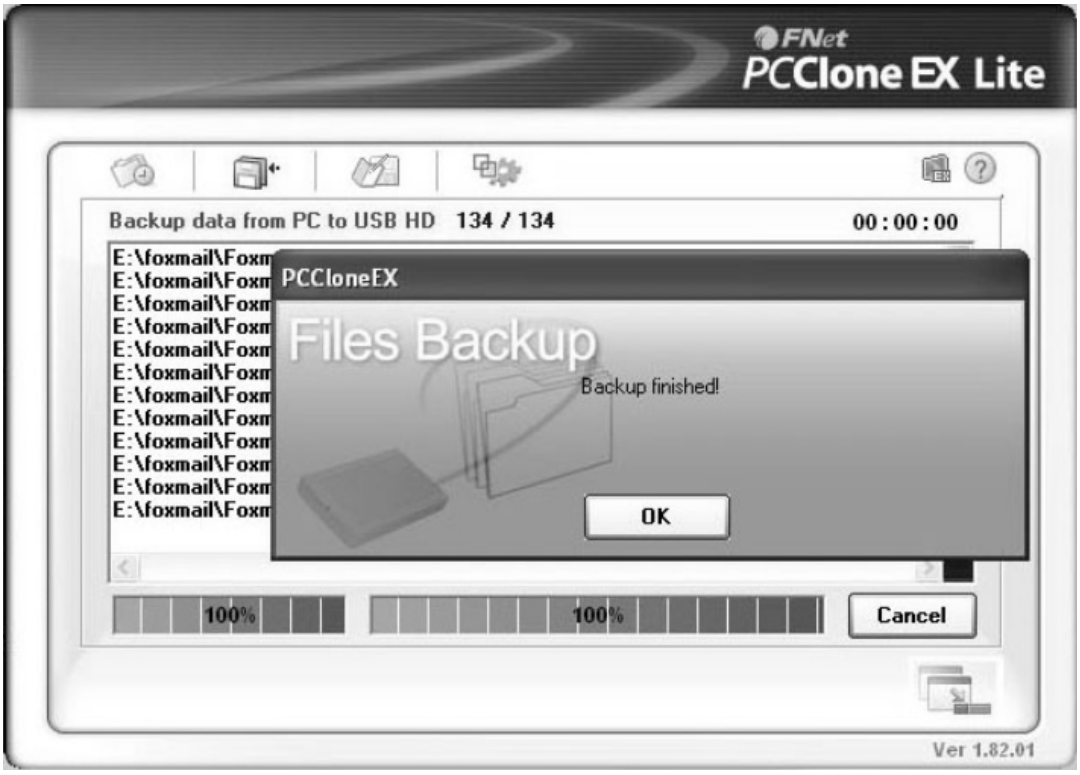

6. The backed-up files(s) should now appear in the right-side window.

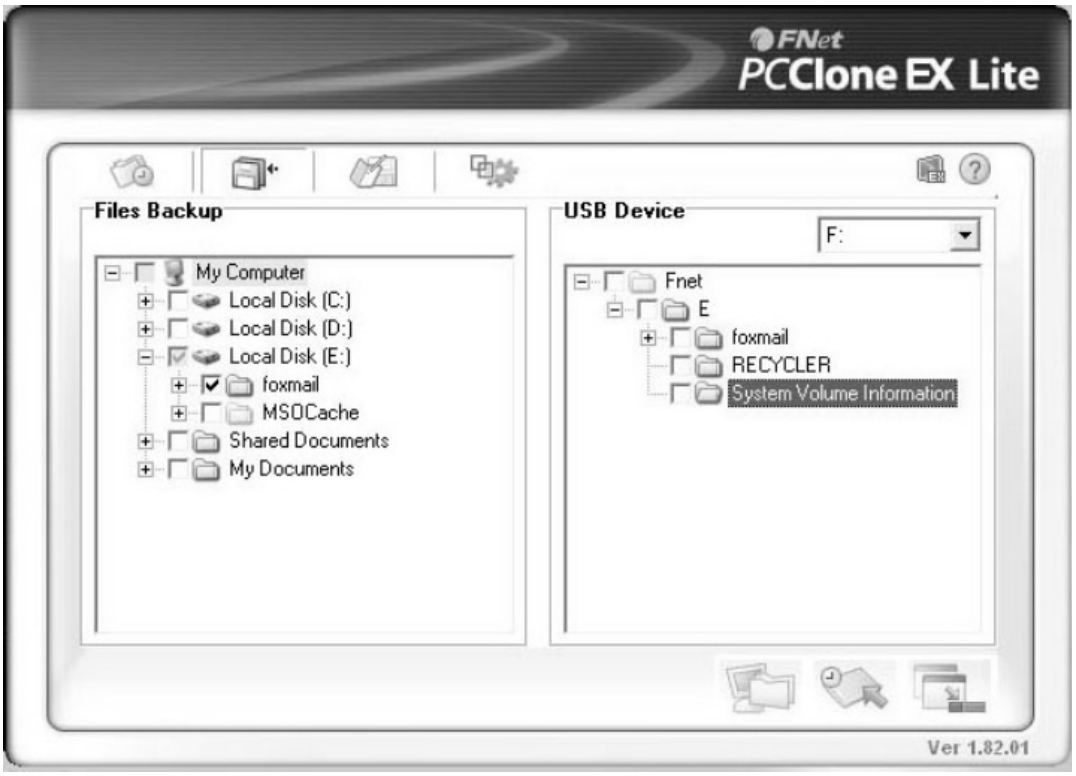

SPECIFICATIONS

Standards and Certifications

- USB 3.0 to SATA interface
- CE
- FCC
- WEEE
- RoHS

General

- JMICRON 539 chipset
- SATA L-type internal data and power connections
- DC single-post power input (power adapter included)
- Power adapter: input, 100 – 240 V, 50 – 60 Hz, 0.8 A; output, 12 V / 2 A; cable, 1.5 m (5 ft.)
- USB 3.0 Standard-A to Standard-B cable, 70 cm (2.25 ft.)
- Working temperature: 0 – 45ºC
- ABS construction
- Power/activity LED indicator
- Enclosure stand
- 19.5 x 12.2 x 3.3 cm (7.75 x 4.8 x 1.3 in.)
- 184 g (6.5 oz.) without hard drive

System Requirements

- Available USB 3.0 Standard-A port
- Windows XP/Vista/7 and Mac* support

Package Contents

- Drive Enclosure
- USB cable, power adapter, stand, installation hardware, screwdriver, software CD and user manual

** One-touch copy feature not supported by Mac systems.*

WASTE ELECTRICAL & ELECTRONIC EQUIPMENT

Disposal of Electric and Electronic Equipment

(applicable in the European Union and other European countries with separate collection systems)

ENGLISH

This symbol on the product or its packaging indicates that this product shall not be treated as household waste. Instead, it should be taken to an applicable collection

point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. If your equipment contains easily removable batteries or accumulators, dispose of these separately according to your local requirements. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, contact your local city office, your household waste disposal service or the shop where you purchased this product. *In countries outside of the EU:* If you wish to discard this product, contact your local authorities and ask for the correct manner of disposal.

DEUTSCH

Dieses auf dem Produkt oder der Verpackung angebrachte Symbol zeigt an, dass dieses Produkt nicht mit dem Hausmüll entsorgt werden darf. In Übereinstimmung mit der Richtlinie 2002/96/EG des Europäischen Parlaments und des Rates über Elektro- und Elektronik-Altgeräte (WEEE) darf dieses Elektrogerät nicht im normalen Hausmüll oder dem Gelben Sack entsorgt werden. Wenn Sie dieses Produkt entsorgen möchten, bringen Sie es bitte zur Verkaufsstelle zurück oder zum Recycling-Sammelpunkt Ihrer Gemeinde.

ESPAÑOL

Este símbolo en el producto o su embalaje indica que el producto no debe tratarse como residuo doméstico. De conformidad con la Directiva 2002/96/CE de la UE sobre residuos de aparatos eléctricos y electrónicos (RAEEI), este producto eléctrico no puede desecha se con el resto de residuos no clasificados. Deshágase de este producto devolviéndolo al punta de venta o a un punta de recogida municipal para su reciclaje.

FRANÇAIS

Ce symbole sur le produit ou son emballage signifie que ce produit ne doitpas être traité comme un déchet ménager. Conformément à la Directive 2002/96/EC sur les déchets d'équipements électriques et électroniques (DEEE), ce produit électrique ne doit en aucun cas être mis au rebut sous forme de déchet municipal non trié. Veuillez vous débarrasser de ce produit en le renvoyant à son point de vente ou au point de ramassage local dans votre municipalité, à des fins de recyclage.

ITALIANO

Questo simbolo sui prodotto o sulla relativa confezione indica che il prodotto non va trattato come un rifiuto domestico. In ottemperanza alla Direttiva UE 2002/96/EC sui rifiuti di apparecchiature elettriche ed elettroniche (RAEEI), questa prodotto elettrico non deve essere smaltito come rifiuto municipale misto. Si prega di smaltire il prodotto riportandolo al punto vendita o al punto di raccolta municipale locale per un opportuno riciclaggio.

POLSKI

Jeśli na produkcie lub jego opakowaniu umieszczono ten symbol, wówczas w czasie utylizacji nie wolno wyrzucać tego produktu wraz z odpadami komunalnymi. Zgodnie z Dyrektywą Nr 2002/96/WE w sprawie zużytego sprzętu elektrycznego i elektronicznego (WEEE), niniejszego produktu elektrycznego nie wolno usuwać jako nie posortowanego odpadu komunalnego. Prosimy o usuniecie niniejszego produktu poprzez jego zwrot do punktu zakupu lub oddanie do miejscowego komunalnego punktu zbiórki odpadów przeznaczonych do recyklingu.

WARRANTY INFORMATION

ENGLISH: For warranty information, go to www.manhattan-products.com/warranty.
DEUTSCH: Garantieinformationen finden Sie unter www.manhattan-products.com/warranty.
ESPAÑOL: Si desea obtener información sobre la garantía, visite www.manhattan-products.com/warranty.
FRANÇAIS: Pour consulter les informations sur la garantie, visitez www.manhattan-products.com/warranty.
POLSKI: Informacje dotyczące gwarancji znajdują się na stronie www.manhattan-products.com/warranty.
ITALIANO: Per informazioni sulla garanzia, accedere a www.manhattan-products.com/warranty.

EN MÉXICO: Poliza de Garantia MANHATTAN — Datos del importador y responsable ante el consumidor IC Intracom México, S.A. de C.V. • Av. Interceptor Poniente # 73, Col. Parque Industrial La Joya, Cuautitlan Izcalli, Estado de México, C.P. 54730, México. • Tel. (55)1500-4500

La presente garantía cubre los siguientes productos contra cualquier defecto de fabricación en sus materiales y mano de obra.

A. Garantizamos los productos de limpieza, aire comprimido y consumibles, por 60 dias a partir de la fecha de entrega, o por el tiempo en que se agote totalmente su contenido por su propia función de uso, lo que suceda primero.
B. Garantizamos los productos con partes moviles por 3 años.
C. Garantizamos los demas productos por 5 años (productos sin partes moviles), bajo las siguientes condiciones:
    1. Todos los productos a que se refiere esta garantía, ampara su cambio físico, sin ningún cargo para el consumidor.
    2. El comercializador no tiene talleres de servicio, debido a que los productos que se garantizan no cuentan con reparaciones, ni refacciones, ya que su garantía es de cambio físico.
    3. La garantía cubre exclusivamente aquellas partes, equipos o sub-ensambles que hayan sido instaladas defábrica y no incluye en ningún caso el equipo adicional o cualesquiera que hayan sido adicionados al mismo por el usuario o distribuidor.

Para hacer efectiva esta garantía bastara con presentar el producto al distribuidor en el domicilio donde fue adquirido o en el domicilio de IC Intracom México, S.A. de C.V., junto con los accesorios contenidos en su empaque, acompañado de su póliza debidamente llenada y sellada por la casa vendedora (indispensable el sello y fecha de compra) donde lo adquirió, o bien, la factura o ticket de compra original donde se mencione claramente el modelo, numero de serie (cuando aplique) y fecha de adquisición. Esta garantia no es val da en los siguientes casos: Si el producto se hubiese utilizado en condiciones distintas a las normales; si el producto no ha sido operado conforme a los instructivos de uso; ó si el producto ha sido alterado o tratado de ser reparado por el consumidor ó terceras personas.

FEDERAL COMMUNICATIONS COMMISSION REGULATORY STATEMENT

FCC Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of Federal Communications Commission (FCC) Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from the receiver.
- Consult the dealer or an experienced radio/TV technician for help.

R&TTE

ENGLISH

This device complies with the requirements of the R&TTE Directive 1999/5/EC.

DEUTSCH

Dieses Gerät enspricht der Direktive R&TTE Direktive 1999/5/EC.

ESPAÑOL

Este dispositivo cumple con los requerimientos de la Directiva R&TTE 1999/5/EC.

FRANÇAIS

Cet appareil satisfait aux exigences de la directive R&TTE 1999/5/CE.

POLSKI

Urządzenie spełnia wymagania dyrektywy R&TTE 1999/5/EC.

ITALIANO

Questo dispositivo è conforme alla Direttiva 1999/5/EC R&TTE.

CE FC

MANHATTAN® offers a complete line of PC Components, Peripherals, Cables and Accessories. Ask your local computer dealer for more information or visit www.manhattan-products.com.

All products mentioned are trademarks or registered trademarks of their respective owners.

MANHATTAN® bietet ein vollständiges Sortiment an PC-Komponenten, Peripherie, Kabel und Zubehör. Weitere Informationen erhalten Sie von Ihrem Händler oder auf www.manhattan-products.com.

Alle genannten Produkt- oder Firmennamen sind eingetragene Marken oder Marken der jeweiligen Firmen.

MANHATTAN® ofrece una línea completa Componentes para PC, Periféricos, Cables y Accesorios. Consulte a su distribuidor local para más información ó visitenos www.manhattan-products.com.

Todos los productos mencionados son marcas comerciales o marcas registradas de sus respectivos propietarios.

MANHATTAN® offre un assortiment complet de composants de PC, des périphériques, des câbles et des accessoires www.manhattan-products.com.

Tous les produits mentionnés sont des marques commerciales ou des marques déposées de leurs propriétaires respectifs.

MANHATTAN® to kompletna linia Komponentów PC, Peryferiów, Kabli oraz Akcesoriów. Poproś lokalnego dealera o więcej informacji lub odwiedź stronę www.manhattan-products.com.pl.

Wszystkie nazwy handlowe i towarów są nazwami i znakami towarowymi zastrzeżonymi odpowiednich firm odnośnych właścicieli.

MANHATTAN® offre una linea completa di componenti per PC, periferiche, cavi e accessori. Chiedi maggiori informazioni al tuo rivenditore di computer o visita il sito www.manhattan-products.com.

Tutti i prodotti sopracitati sono marchi di fabbrica o marchi registrati depositati dai proprietari.

MANHATTAN™

BRINGING COMPUTERS TO LIFE

Copyright © MANHATTAN